



GRK TRIM (FIN/RT)

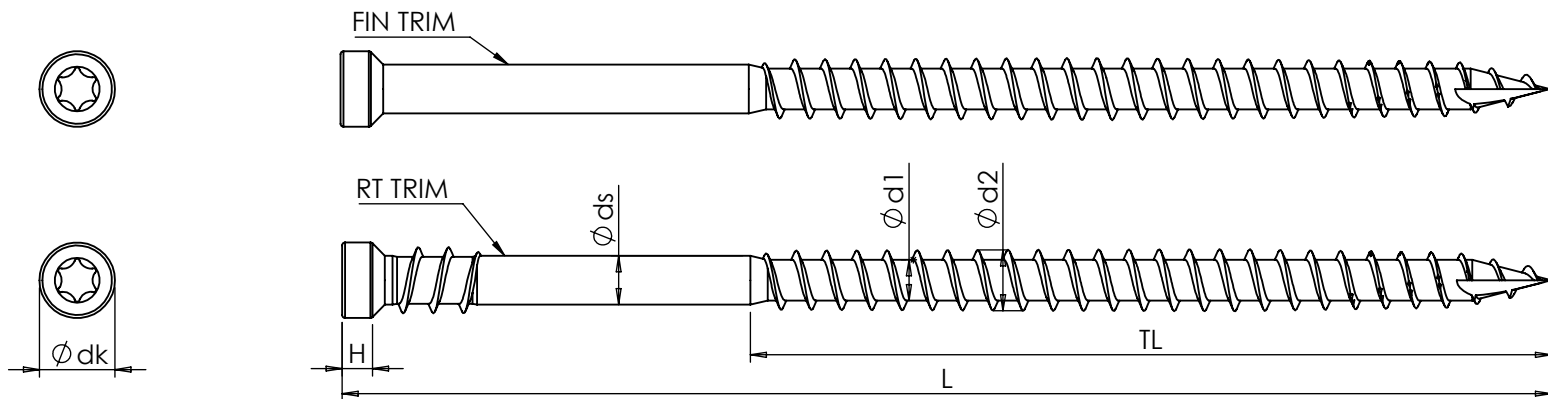

SIZE (Dia)	Head diameter (dk)	Head height (H)	Shank diameter (ds)	Minor diameter (d1)	Major diameter (d2)	SIZE(Length)	Length (L)	Thread length (TL)
# 8	0.197	0.083	0.111	0.100	0.156	1-1/4"	1.250	0.787
# 9	0.230	0.110	0.128	0.112	0.175	1-1/2"	1.575	1.000
						2"	2.000	1.299
						2-1/2"	2.500	1.575
						2-3/4"	2.750	1.811
						3-1/8"	3.150	2.087
						4"	4.000	1.968
Dimensions are in inches without any manufacturing tolerances ! More technical info also available under ICC ESR # 3201 #8 has a T-10 Star drive. #9 has a T-15 Star drive.						5"	5.000	1.968

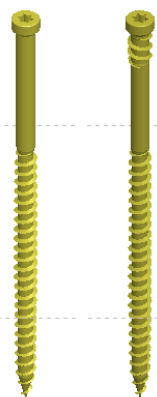

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Illinois Tool Works Inc. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Illinois Tool Works Inc. IS PROHIBITED.

Distribution Record	Headmark			NAME	DATE	
ITW				S.Ruhmann	MARCH 27-2015	
				DRAWN		
				CHECKED		
				ENG APPR.		
				MFG APPR.		955 National Parkway, Suite 95500 Schaumburg, IL 60173 USA
				Q.A.		
						DWG. NO.
						Sales Support TRIM Screw
						REV. 0
						TRIM (FIN/RT)
						SHEET 1 OF 1